# 3 ACCU-PRO AT/MT BEDKNIFE GRINDERS

## **SPECIFICATIONS:**

6610901\* (661 AT) 6610921\* (661 MT) Part #

115 volts, 50/60 hertz, single phase, 15 amp circuit Power

Weight 730 lbs. (331 kg)

**Grinding Wheel** 6" OD x 1-1/4" ID x 2" thick 46 grit type 6 3/4 HP AC grinding motor, totally enclosed, Carriage Base

fan cooled, 3450 RPM

\*This number denotes a 110 VAC machine. For equipment requiring 220 VAC power a different part number is required.

### STANDARD FEATURES:

- Robust Frame Design Welded-steel frame and powder coated finish
- Traverse System Automatic belt drive variable speed using proximity sensors (661 AT) Manual traverse on the (661 MT). Cogged traverse belt with 38" travel capacity; two 1.000 +/- .00025 polished shafts; 90 Volt DC traverse motor
- Infeed Manual
- · Coolant 1 pint of flood coolant provided
- Carriage "V" roller carriage single point infeed with adjustable grinding
- Rails Precision ground round rails with recirculation ball bearings
- Diamond Point Dresser System Self contained dresser system
- · Bedknife Set-up Permanent magnets with spring-loaded placement pins and centers for added support

## **OPTIONAL EQUIPMENT:**


- Borazon grinding wheel for hardened bedknives Order Part #3700696
- · 220v to 110v Step-down Transformer

Because Foley United is continually improving its products, specifications are subject to change without notice.


United in upping the game.

Phone: 1-715-426-5151 Toll-Free: 1-800-225-9810 www.foleyunited.com

## **DIMENSIONS:**

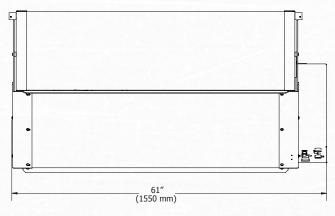

**TOP VIEW** 

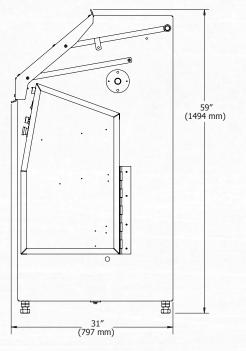

Distributed By:



©2018 Foley United UTI 306 LIT 3730127





SIDE VIEW

651

ACCU-PRO AT/MT

**BEDKNIFE GRINDERS** 

## APPROVED.

## ACCU-PRO 661 AT/MT BEDKNIFE GRINDERS

Economy bedknife grinder provides more for less...

The ACCU-Pro 661 AT and ACCU-Pro 661 MT are packed with features without breaking the budget. The 661 MT has all the same great features of the 661 AT, minus the low maintenance traverse belt and electronics for the auto-traverse (AT) function.



**Bedknife Support Tooling** uses permanent magnet to secure the bedknife.

Full Featured Grinding Head Design allows for incremental infeeds of .001" (.025 mm) as the rigid carriage makes grinding smooth and precise.

Smooth Auto-Traverse Function to traverse the grinding head automatically down the length of the bedknife on two precision rails. (661 AT)

MAGNETIC MOUNTING SYSTEM

Utilizes industrial style permanent magnets in conjunction with center supports to provide a precision, rigid, and stress free set-up of the bedknife.



#### PRECISION GRINDING HEAD

Robust grinding head features a single point infeed, a height adjuster to compensate for the variable width top face bedknives, and a 3/4 HP grinding motor that smoothly removes metal for a precise grind.



#### PROTECTIVE SHIELD

Easy open protective shield allows for quick access when setting up to grind. Tough polycarbonate shield protects the user while still providing good visibility.



**LEARN MORE:** www.foleyunited.com

#### FLOOD COOLANT SYSTEM

**EASY ANGLE POSITIONS** 

permanently mounted

provides the operator

a fast and repeatable

angle as spelled out

by the manufacturer

bedknife

specifications for each

The easy to read

protractor system

lexible tube enables spray to A self contained water pump system filters and recirculates the water, while flow is controlled by the operator.



#### BELT TRAVERSE SYSTEM

Proximity sensors control the travel of the carriage as the maintenance free traverse belt drive system allows for a prefect grind everytime.



#### BUILT-IN DIAMOND DRESSER

A diamond tip dresser handle flips up to dress the grinding wheel, is easily adjusted to the stores out of the way when not in use.



#### CONTROL PANEL

Access to the panel is in an operator friendly location that provides variable speed for traverse, a flood coolant system, and other controls needed for quick turn-around and a precise grind



#### INTERLOCK SAFETY **SWITCH**

Guard door with interlock safety switch securely ensures operation when the door is closed, keeping shop staff safe and out of harms way.